



11/18/99

15520 U.S. PTO

PATENT

Docket No. 1232-4599

Express Mail Label No. EJ606949174US

15520 U.S. PTO

09/442835

11/18/99

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

UTILITY APPLICATION AND APPLICATION FEE TRANSMITTAL (1.53(b))

ASSISTANT COMMISSIONER FOR PATENTS
Box Patent Application
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

Named Inventor(s) and
Address(es):

Yoshiro UDAGAWA, 8-17, Kawabata 3-chome, Miyashiro-machi, Minami Saitama-gun, Saitama-ken, Japan

For:

IMAGE PICKUP APPARATUS

Enclosed are:

☒ 18 page(s) of specification, 1 page(s) of Abstract, 2 page(s) of claims

☒ 5 sheets of drawing ☒ formal ☐ informal

☐ — Page(s) of Declaration and Power of Attorney

☐ Unsigned

☐ Newly Executed

☐ Copy from prior application

☐ Deletion of inventors including Signed Statement under 37 C.F.R. § 1.63(d)(2)

☒ Incorporation by Reference: The entire disclosure of the priority application(s) identified below, is considered as being part of the disclosure of the accompanying application and is incorporated herein by reference.

☐ Microfiche Computer Program (Appendix)

☐ — page(s) of Sequence Listing

☐ computer readable disk containing Sequence Listing

☐ Statement under 37 C.F.R. § 1.821(f) that computer and paper copies of the Sequence Listing are the same

☒ Claim for Priority Japanese Application No 10-349328 filed 11/25/98

☐ Certified copy of Priority Document(s)

- ☐ English translation documents
- ☐ Information Disclosure Statement
- ☐ Copy of Cited references w/ English Abstracts
- ☐ Copy of PTO-1449 filed in parent application serial No.
- ☒ Preliminary Amendment
- ☒ Return receipt postcard (MPEP 503)
- ☐ Assignment Papers (assignment cover sheet and assignment documents)
- ☐ A check in the amount of \$40.00 for recording the Assignment.
- ☐ Assignment papers filed in parent application Serial No.
- ☐ Certification of chain of title pursuant to 37 C.F.R. § 3.73(b).
- ☐ This is a ☐ continuation ☐ divisional ☐ continuation-in-part (C-I-P) of prior application serial no.
- ☐ Cancel in this application original claims of the parent application before calculating the filing fee. (At least one original independent claim must be retained for filing purposes.)
- ☐ A preliminary Amendment is enclosed. (Claims added by this Amendment have been properly numbered consecutively beginning with the number following the highest numbered original claim in the prior application.
- ☐ The status of the parent application is as follows:
- ☐ A Petition For Extension of Time and a Fee therefor has been or is being filed in the parent application to extend the term for action in the parent application until .
- ☐ A copy of the Petition for Extension of Time in the co-pending parent application is attached.
- ☐ No Petition For Extension of Time and Fee therefor are necessary in the co-pending parent application.
- ☐ Please abandon the parent application at a time while the parent application is pending or at a time when the petition for extension of time in that application is granted and while this application is pending has been granted a filing date, so as to make this application co-pending.
- ☐ Transfer the drawing(s) from the patent application to this application.
- ☐ Amend the specification by inserting before the first line the sentence:
This is a ☐ continuation ☐ divisional ☐ continuation-in-part of co-pending application Serial No. filed .

I. CALCULATION OF APPLICATION FEE (For Other Than A Small Entity)

			Basic Fee	
	Number Filed	Number Extra	Rate	\$ 760.00
Total Claims	24	-20=	4	x\$18.00 \$ 72.00
Independent Claims	4	-3=	1	x78.00 \$ 0
Multiple Dependent Claims				
	[] yes		Additional Fee =	\$260.00
	[X] no		Add'l Fee =	NONE \$ 0

Total: \$832.00

[] A statement claiming small entity status is attached or has been filed in the above-identified parent application and its benefit under 37 C.F.R. § 1.28(a) is hereby claimed. Reduced fees under 37 C.F.R. § 1.9(F) (50% of total) paid herewith \$ _____.


[X] A check in the amount of \$832.00 for payment of the application filing fees is attached.

[] Charge Fee(s) to Deposit Account No. 13-4500. Order No. _____. A DUPLICATE COPY OF THIS SHEET IS ATTACHED.

[X] The Assistant Commissioner is hereby authorized to charge any additional fees which may be required for filing this application, or credit any overpayment to Deposit Account No. 13-4500, Order No. 1232-4599. A DUPLICATE COPY OF THIS SHEET IS ATTACHED.

Respectfully submitted,

MORGAN & FINNEGAN, L.L.P.



By: _____
Michael M. Murray
Registration No. 32,537

Dated: November 19, 1999

CORRESPONDENCE ADDRESS
MORGAN & FINNEGAN, L.L.P.
345 Park Avenue
New York, New York 10154
(212) 758-4800
(212) 751-6849 Facsimile

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants : Yoshiro Udagawa
Serial No. : To Be Assigned Examiner: To Be Assigned
Filed : November 19, 1999 (Herewith) Group Art Unit: TBA
For : IMAGE PICKUP APPARATUS

EXPRESS MAIL CERTIFICATE

Express Mail Label No. EJ606949174US

Date of Deposit November 18, 1999

I hereby certify that the following attached paper(s) and/or fee
Application Fee Transmittal (in duplicate); 18 pp. of specs., 1 page of abstract, 9 pp. claims (24 TOTAL
claims); 5 Sheets of Formal Drawings (Figs. 1-6); check in the amount of \$832.00; and return receipt
postcard


is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37

C.F.R. §1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Box New

Applications, Washington, D.C. 20231.

Francisco J. Garcia

Typed or printed name of person
mailing paper(s) and/or fee)


(Signature of person mailing
paper(s) and/or fee)

CORRESPONDENCE ADDRESS:
MORGAN & FINNEGAN, L.L.P.
345 Park Avenue
New York, New York 10154
(212) 758-4800
(212) 751-6849 Facsimile

Image Pickup Apparatus

BACKGROUND OF THE INVENTION

Field of the Invention

5 The present invention relates to an image pickup method and apparatus and a storage medium storing a control program for controlling the image pickup apparatus.

Related Background Art

10 Conventionally, white balance processing is performed by the following method in a digital camera such as an image pickup apparatus.

 As shown in Fig. 6, when the shutter (not shown) is depressed to the first stroke (SW1), white balance processing (WB processing) is started by using a
15 predetermined white balance coefficient as an initial value. After a final white balance coefficient is determined upon convergence and completion of this processing, the shutter can be depressed to the second
20 stroke (SW2). An image signal is stored in the memory at the timing at which SW2 is closed. The data stored in the memory is raw data output from a CCD (charge-coupled device) or the like. This data is
25 subjected to signal processing in a so-called signal processing circuit to become recording data. The recording data is recorded on a recording medium. The white balance coefficient (WB coefficient) immediately

before closing of SW2 is obtained as a parameter to be used for processing for the recording data and set in the signal processing circuit. This parameter is recorded on the recording medium after the raw data stored in the memory is subjected to signal processing.

In the above conventional apparatus, when image pickup is to be performed by using a strobe, strobe light is emitted instantaneously at the timing of SW2. Consequently, the above processing after SW1 in Fig. 5 (i.e., continuous white balance detection) cannot be performed. For this reason, a fixed white balance coefficient for predetermined strobe emission is set. In some case, therefore, external light influences image pickup stronger than strobe light depending on the object distance, and an object located at a long distance and irradiated with reddish tungsten light is processed into a red image.

SUMMARY OF THE INVENTION

The present invention has been made in consideration of the above problem in the prior art, and has as its object to provide an image pickup method and apparatus which can realize accurate white balance reproduction and shorten the loop processing time for white balance processing.

It is the second object of the present invention to provide a storage medium storing a control program

that can smoothly control the image pickup apparatus of the present invention.

In order to achieve the first object, according to the first aspect of the present invention, there is
5 provided an image pickup method comprising at least the first detection step of calculating a white balance coefficient from image signal data before image pickup, and the second detection step of calculating a white balance coefficient from image signal data after image
10 pickup, characterized in that the method further comprises the selection step of selecting at least one of two types of detection results obtained in the first and second detection steps and a computation result obtained by computing the two types of detection
15 results, the signal processing step of performing signal processing by using one of the detection result and computation result, selected in the selection step, and the output step of outputting at least one of processed data subjected to signal processing in the
20 signal processing step.

In order to achieve the first object, according to the second aspect of the present invention, in the image pickup method according to the first aspect, the output step is characterized by displaying an output.

25 In order to achieve the first object, according to the third aspect of the present invention, in the image pickup method according to the first aspect, the output

step is characterized by recording an output.

In order to achieve the first object, according to the fourth aspect of the present invention, in the image pickup method according to the first aspect, the first detection step is characterized by a step of using live image data used for framing before image pickup, and the second step is characterized by a step of using still image data obtained by image pickup and stored in a memory.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing the system configuration of an image pickup apparatus according to an embodiment of the present invention;

Fig. 2 is a flow chart showing the flow of white balance processing in the image pickup apparatus according to the embodiment;

Figs. 3A, 3B, 3C and 3D are views showing the operation timing of white balance processing in each image pickup mode of the image pickup apparatus according to the embodiment;

Fig. 4 is a view showing the relationship between the initial value in white balance processing and the generation timing of a white balance coefficient for signal processing for recording image data in each image pickup mode of the image pickup apparatus according to the embodiment;

Figs. 5A and 5B are views showing the operation timings of white balance processing and the like in image pickup modes (1) and (3) of the image pickup apparatus according to the embodiment; and

5 Fig. 6 is a view showing white balance processing in the prior art.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Each embodiment of the present invention will be
10 described below with reference to the accompanying drawings.

The first embodiment of the present invention will be described first.

Fig. 1 is a block diagram showing the system
15 configuration of a digital still camera as an image pickup apparatus according to an embodiment of the present invention. Referring to Fig. 1, this camera is comprised of an optical system 1 including a lens and the like, a photoelectric conversion element (CCD in
20 this embodiment) 2 for converting an optical signal from the optical system 1 into an electrical signal, a CDS (Correlation Double Sampling) circuit 3 for converting an output signal from the CCD 2 into a video signal, an A/D converter 4 for converting an analog
25 signal output from the CDS circuit 3 into a digital signal, a memory controller 5 for controlling a memory 9 (to be described later), a system controller 6 for

generating a signal for driving a CCD driver (not shown) and controlling the memory controller 5, a D/A converter 7 for converting a digital signal output from the memory controller 5 into an analog signal, a
5 display unit 8 such as a color liquid crystal display for displaying data, picked image, and the like, the memory 9 such as a RAM used to store image data, a compression circuit 10 for compressing an image signal by a compression scheme such as JPEG, a DSP (Digital
10 Signal Processor) 11 for performing various signal processes such as color signal processing and luminance signal processing, an EEPROM (Electrically Erasable Programmable Read Only Memory) 12 used to hold a white balance coefficient (WBstd) for a standard light
15 source, a white balance coefficient (WBf1) for first strobe light, a white balance coefficient (WBf2) for second strobe light, and the like, a card memory 13 in which image-picked data and the like are stored, a release switch 14 as a two-stroke switch which is
20 depressed to the first stroke to turn on the first switch SW1 and is depressed to the second stroke to turn on the second switch SW2, and a strobe control circuit 15 for controlling a strobe (not shown).

Referring to Fig. 1, an object image (not shown)
25 is formed on the image pickup surface of the CCD 2 through the optical system 1. The electric signal generated by photoelectric conversion performed by the

CCD 2 is input as an output signal from the CCD 2 to the CDS circuit 3 and A/D converter 4 to be converted into a video signal and digital signal. Thereafter, the resultant data is stored as one-frame data in the memory 9 through the memory controller 5. The image data in the memory 9 is subjected to signal processing in the DSP 11 through the memory controller 5. The resultant data is compressed by the JPEG circuit 10 and recorded on the card memory 13 through an I/F (interface) 16.

If an image display switch (not shown) is turned on, the data having undergone A/D conversion in the A/D converter 4 is directly input to the DSP 11 without being stored in the memory 9. After the data is subjected to signal processing in the DSP 11, the resultant data is output to the display unit 8 through the D/A converter 7.

Basic operation of white balance processing will be described next with reference to the flow chart of Fig. 2.

When white balance processing is started, an initial value is read out in step S201. In step S202, a white balance coefficient (WB coefficient) is set in the DSP 11 in Fig. 1. In step S203, white balance data (WB data) is obtained in accordance with the white balance coefficient set in step S202. In step S204, it is checked whether the white balance data obtained in

step S203 is less than a predetermined value. If YES in step S204, the white balance coefficient is determined, and the processing is terminated.

If it is determined in step S204 that the white balance data is not less than the predetermined value, the following loop is repeated. In step S205, the value of the white balance coefficient is changed. The flow then returns to step S202 to set the white balance coefficient again. In step S203, white balance data is obtained. In step S204, it is checked whether the white balance data obtained in step S203 is less than the predetermined value.

While the current image picked by the CCD 2 is displayed on the display unit 8 in FIG. 1, the above white balance processing is consecutively performed at predetermined intervals to correct the white balance of the image displayed on the display unit 8.

White balance processing to be performed in each image pickup mode will be described next with reference to Figs. 3A to 3D.

(1) When Display Unit 8 Is On without Strobe (Fig. 3A)

The current image picked by the CCD 2 is displayed on the display unit 8, and white balance processing has already been performed consecutively before SW1. When the first switch SW1 is turned on by the release switch 14, the DSP 11 computes the white balance coefficient

during the interval between SW1 and SW2 on the basis of the image signal obtained when the first switch SW1 is turned on. The computed coefficient is stored as a white balance coefficient WBSwl in the memory 9. In this state, the second switch SW2 can be turned on, and ON operation of SW2 is inhibited until the WB processing is complete. When the second switch SW2 is turned on, the image data picked by the CCD 2 is stored in the memory 9. The image data stored in the memory 9 is subjected to signal processing using the white balance coefficient (WBSwl).

In mode (1), since the interval between SW1 and SW2 is short, the color temperature of the image signal obtained from the CCD 2 when the first switch SW1 is turned on is close to that of the image signal obtained from the CCD 2 when the second switch SW2 is turned on. For this reason, WB processing can be performed faster in this mode than in a case wherein WB processing is performed by using a predetermined value SBstd when the first switch SW1 is turned on. That is, the computation interval between SW1 and SW2 is shortened. This prevents the user from missing the shutter chance.

(2) When Display Unit 8 Is Off without Strobe
(Fig. 3B)

When the first switch SW1 is turned on by the release switch 14, the first switch SW1 can be turned on without performing white balance processing at this

timing. When the second switch SW2 is turned on, the image data picked by the CCD 2 is stored in the memory 9. The DSP 11 starts white balance processing for the image data stored in the memory 9 by using a

5 predetermined white balance coefficient WBstd as an initial value. The image data is then subjected to signal processing using a white balance coefficient (WBsw2) computed by the white balance processing.

10 In mode (2), since white balance processing is executed by using the predetermined white balance coefficient WBstd as an initial value, the processing time is long. However, since WB processing is executed after the image signal is obtained, i.e., the second switch SW2 is turned on, the interval between SW1 and
15 SW2 is not prolonged. This allows the user to perform appropriate image pickup.

(3) When Display Unit 8 is ON with First Strobe (Fig. 3C)

20 The current image picked by the CCD 2 is displayed on the display unit 8, and white balance processing has been performed before SW1. When the first switch SW1 is turned on by the release switch 14, the DSP 11a computes the white balance coefficient during the interval between SW1 and SW2 on the basis of the image
25 signal obtained when the first switch SW1 is turned on. This computed coefficient is stored as the white balance coefficient WBsw1 in the memory 9. In this

state after computation of the white balance coefficient WBSw1, the second switch SW2 can be turned on. When the second switch SW2 is turned on, the first strobe synchronously emits light. The image data
5 picked by the CCD 2 at this time is stored in the memory 9. White balance processing for the image data stored in the memory 9 is started by using the average value of the computed coefficient WBSw1 and
10 predetermined strobe coefficient WBf1 as an initial value. Signal processing for the image data is then performed by using the average value of the white balance coefficient (WBSw2), obtained when this white balance processing is complete, and the white balance coefficient (WBf1) for the first strobe.

15 In mode (3), since the average value of the white balance coefficient WBSw1 computed before strobe emission and the white balance coefficient WBf1 for strobe emission is computed as an initial value, WB processing can be speeded up. In addition, since the
20 average value of the white balance coefficient WBSw2 obtained by WB processing and the predetermined strobe coefficient is used as an actual white balance coefficient, color signal processing resistant to the influences of external light can be performed. This
25 also prevents the user from missing the shutter chance.

(4) When Display Unit 8 is OFF with First Strobe (Fig. 3D)

When the first switch SW1 is turned on by the release switch 14, the second switch SW2 can be immediately turned on without performing white balance processing at this timing. When the second switch SW2 is turned on, the first strobe synchronously emits light, and the image data picked by the CCD 2 is stored in the memory 9. White balance processing for the image data stored in the memory 9 is started by using the average value of the predetermined coefficient WBstd for standard light and predetermined strobe coefficient WBfl as an initial value. Signal processing for the image data is then performed by using the average value of the white balance coefficient (WBsw2) computed by the white balance processing and white balance coefficient (WBfl) for the first strobe.

In mode (4), as in mode (2), since WB processing is executed after the second switch SW2 is turned on, the interval between SW1 and SW2 is shortened to prevent the user from missing the shutter chance. In addition, since the average value of the white balance coefficient obtained by WB processing and the predetermined strobe coefficient is used as an actual white balance coefficient, color signal processing resistant to the influences of external light can be performed.

Note that if the second strobe is mounted in place

of the first strobe, a white balance coefficient (WBf2) for the second strobe is used in place of the white balance coefficient WBf1.

Fig. 4 shows the relationship between the initial value in white balance processing and the white balance coefficient for signal processing in each of image pickup modes (1) to (4) described above.

With this arrangement, a more accurate white balance coefficient can be obtained in each image pickup mode. In addition, since an initial value closer to a convergence value can be set in loop processing for white balance processing, the convergence time can be shortened.

In the first embodiment, the white balance coefficient for the strobe is stored in the EEPROM 12 in the camera body in advance. However, the present invention is not limited to this. According to another embodiment, a white balance coefficient is stored in the strobe, and the stored white balance coefficient is read out every time an image is picked up. Alternatively, this white balance coefficient may be read out from the strobe and stored in the camera body when the strobe is mounted.

According to the first embodiment described above, in modes (1) and (3), the white balance coefficient WBSw1 is computed within the interval between SW1 and SW2 on the basis of the image signal obtained when the

first switch SW1 is turned on. In modes (1) and (3), however, since white balance processing has been continuously performed before the first switch SW1 is turned on, the white balance coefficient computed at the ON timing of the first switch SW1 may be used as the coefficient WBSwl. This eliminates the necessity to perform white balance processing within the interval between SW1 and SW2, and can shorten the interval between SW1 and SW2, thereby preventing the user from missing the shutter chance.

Figs. 5A and 5B are timing charts each showing image pickup operation in such an image pickup mode. Fig. 5A is a timing chart showing image pickup operation to be performed when the display unit is ON and strobe emission is OFF. This operation corresponds to mode (1). Fig. 5B is a timing chart showing image pickup operation to be performed when both the display unit and strobe emission are ON. This operation corresponds to mode (3). Both the operations in Figs. 5A and 5B are processed in the same manner as in the first embodiment except that the apparatus obtains the white balance coefficient WBSwl at the timing of SW1 instead of obtaining the white balance coefficient WBSwl within the interval between SW1 and SW2. Therefore, a description of this operation will be omitted.

In each embodiment described above, finally

processed image data may be stored in the card memory 13 and displayed on the display unit 8.

5 In each embodiment described above, image data processed with only one white balance coefficient is recorded. However, the present invention is not limited to this, and image data processed with a plurality of different white balance coefficients may be recorded. In addition, after two different types of processed image data are displayed on the display unit 10 8, one of the two types of processed image data may be selected by using a selecting device (not shown), and only the selected image data may be recorded.

15 In each embodiment described above, the average value of the white balance coefficients WBSw2 and WBfl is used as a white balance coefficient for signal processing for recording data when the strobe is used. However, the present invention is not limited to this. If the performance of the strobe is poor, only the white balance coefficient WBSw2 may be used.

20 In each embodiment described above, the external strobe mounted on the camera body has been exemplified. However, the present invention is not limited to this, and can be applied to a built-in strobe incorporated in the camera body.

25 In each embodiment described above, the average value of two white balance coefficients is computed. However, the present invention is not limited to this.

When a white balance coefficient for the strobe is to be computed, in particular, the amount of light emitted by the strobe is detected, and the ratio of the amount of external light to the amount of light emitted by the strobe is calculated. A white balance coefficient
5 corresponding to an internally dividing point between the white balance coefficients WBSw2 and WBf1 may be used in accordance with the calculated ratio.

As has been described in detail above, according
10 to the image pickup method and apparatus of each embodiment described above, accurate white balance reproduction can be realized by setting an initial value and acquiring an appropriate white balance coefficient, and the loop processing time for white
15 balance processing can be shortened.

In addition, according to the storage medium of each embodiment described above, the above image pickup apparatus can be smoothly controlled.

The objects of the present invention are also
20 achieved by supplying a storage medium, which records a program code of a software program that can realize the functions of the above-mentioned embodiments to the system or apparatus, and reading out and executing the program code stored in the storage medium by a computer
25 (or a CPU or MPU) of the system or apparatus.

In this case, the program code itself read out from the storage medium realizes the functions of the

above-mentioned embodiments, and the storage medium which stores the program code constitutes the present invention.

5 As the storage medium for supplying the program code, for example, a floppy disk, hard disk, optical disk, magneto-optical disk, CD-ROM, CD-R, magnetic tape, nonvolatile memory card, ROM, and the like may be used.

10 The functions of the above-mentioned embodiments may be realized not only by executing the readout program code by the computer but also by some or all of actual processing operations executed by an OS (operating system) running on the computer on the basis of an instruction of the program code.

15 Furthermore, the functions of the above-mentioned embodiments may be realized by some or all of actual processing operations executed by a CPU or the like arranged in a function extension board or a function extension unit, which is inserted in or connected to
20 the computer, after the program code read out from the storage medium is written in a memory of the extension board or unit. When the present invention is applied to the above storage medium, the program codes
25 corresponding to above flow chart are stored in the storage medium. In brief, an indispensable module for the camera control system of the present invention is stored in the storage medium.

Many widely different embodiments of the present invention may be constructed without departing from the spirit and scope of the present invention. It should be understood that the present invention is not limited to the specific embodiments described in the specification, except as defined in the appended claims.

10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229

WHAT IS CLAIMED IS:

1. An image pickup apparatus comprising:

image pickup means for picking up an image of an object;

5 operation means for operating an image pickup timing for image picking up the object to be recorded; and

white balance control means, having a first mode of acquiring information about white balance in
10 accordance with first operation by said operation means and executing image pickup operation of said image pickup means in accordance with second operation at a timing after the first operation timing, and a second mode of acquiring information about white balance in
15 accordance with the second operation, for controlling white balance of an image picked up in accordance with the second operation on the basis of the information about white balance which are obtained in the first and second modes.

20

2. An apparatus according to claim 1, wherein said apparatus further comprises display means for displaying an image picked by said image pickup means, said white balance control means controls white balance
25 of the image displayed by said display means, and the information about white balance which is acquired in the first mode uses information about the white balance

of the image displayed by said display means.

3. An apparatus according to claim 2, wherein
said white balance control means computes information
5 about white balance in the first mode on the basis of
the image picked up by said image pickup means at the
first operation timing.

4. An apparatus according to claim 2, wherein
10 said white balance control means uses information about
white balance which is used for controlling white
balance of the image displayed by said display means at
the first operation timing, as information about white
balance in the first mode.

15

5. An apparatus according to claim 1, wherein
said white balance control means acquires information
about white balance in the second mode on the basis of
the image picked up in accordance with the second
20 operation.

6. An apparatus according to claim 1, further
comprising:

25 strobe means for illuminating an object; and
storage means storing information about white
balance when said strobe means illuminates the object,
wherein said white balance control means computes

information about white balance of the image picked up
in accordance with the second operation by using a
white balance coefficient, as an initial value, which
is obtained on the basis of information about white
5 balance acquired on the basis of the first operation
and information about white balance stored in said
storage means, when said white balance control means
causes said strobe means to illuminate the object in
the first mode.

10 7. An apparatus according to claim 6, wherein
said white balance control means controls white balance
of the image picked up in accordance with the second
operation on the basis of a white balance coefficient
15 computed on the basis of computed information about
white balance and information about white balance
stored in said storage means, when said white balance
control means causes said strobe means to illuminate
the object in the first mode.

20 8. An apparatus according to claim 6, wherein
said white balance control means controls white balance
of the image picked up in accordance with the second
operation on the basis of information about white
25 balance acquired in the second mode and information
about white balance stored in said storage means, when
said white balance control means causes said strobe

means to illuminate the object in the second mode.

9. An image pickup method comprising:

an image pickup step of picking up an image of an
5 object;

an operation step of operating an image pickup
timing for image picking up the object to be recorded;
and

a control step, having a first mode of acquiring
10 information about white balance in accordance with
first operation and executing image pickup operation in
the image pickup step in accordance with second
operation at a timing after the first operation timing,
and a second mode of acquiring information about white
15 balance in accordance with the second operation, of
controlling white balance of an image picked up in
accordance with the second operation on the basis of
the information about white balance which are obtained
in the first and second modes.

20

10. A method according to claim 9, further
comprising a display step of displaying an image picked
in the image pickup step, wherein said control step
controls white balance of the displayed image, and the
25 information about white balance which is acquired in
the first mode uses information about the white balance
of the image displayed in said display step.

11. A method according to claim 9, wherein said control step computes information about white balance in the first mode on the basis of the image picked up in the image pickup step at the first operation timing.

5

12. A method according to claim 10, wherein said control step uses information about white balance which is used for controlling white balance of the image displayed in said display step at the first operation timing, as information about white balance in the first mode.

10

13. A method according to claim 9, wherein said control step acquires information about white balance in the second mode on the basis of the image picked up in accordance with the second operation.

15

14. A method according to claim 9, further comprising:

20

an illumination step of illuminating an object;

a storing step of storing information about white balance when the object is illuminated in said illumination step; and

25

wherein said control step computes information about white balance of the image picked up in accordance with the second operation by using a white balance coefficient, as an initial value, which is

obtained on the basis of information about white
balance acquired on the basis of the first operation
and stored information about white balance, when the
object is illuminated in said illumination step in the
5 first mode.

15. A method according to claim 14, wherein said
control step controls white balance of the image picked
up in accordance with the second operation on the basis
10 of a white balance coefficient computed on the basis of
computed information about white balance and stored
information about white balance, when the object is
illuminated in said illumination step in the first
mode.

15

16. A method according to claim 14, wherein said
control step controls white balance of the image picked
up in accordance with the second operation on the basis
of information about white balance acquired in the
20 second mode and stored information about white balance,
when the object is illuminated in said illumination
step in the second mode.

17. A recording medium for computer-readable
25 storing a program for executing an image pickup method,
the image pickup method comprising:

an image pickup step of picking up an image of an

object;

an operation step of operating an image pickup timing for image picking up the object to be recorded; and

- 5 a control step, having a first mode of acquiring information about white balance in accordance with first operation and executing image pickup operation in the image pickup step in accordance with second operation at a timing after the first operation timing, and a second mode of acquiring information about white balance in accordance with the second operation, of controlling white balance of an image picked up in accordance with the second operation on the basis of the information about white balance which are obtained 10 in the first and second modes.

18. A medium according to claim 17, wherein the method further comprises a display step of displaying an image picked in the image pickup step, said control 20 step controls white balance of the displayed image, and the information about white balance which is acquired in the first mode uses information about the white balance of the image displayed in said display step.

- 25 19. A medium according to claim 18, wherein said control step computes information about white balance in the first mode on the basis of the image picked up

in the image pickup step at the first operation timing.

20. A medium according to claim 18, wherein said control step uses information about white balance which is used for controlling white balance of the image displayed in said display step at the first operation timing, as information about white balance in the first mode.

21. A medium according to claim 17, wherein said control step acquires information about white balance in the second mode on the basis of the image picked up in accordance with the second operation.

22. A medium according to claim 17, wherein the method further comprises:

an illumination step of illuminating an object;
a storing step of storing information about white balance when the object is illuminated in the illuminating step; and

computing information about white balance of the image picked up in accordance with the second operation by using a white balance coefficient, as an initial value, which is obtained on the basis of information about white balance acquired on the basis of the first operation and stored information about white balance, when the object is illuminated in said illumination

step in the first mode.

23. A medium according to claim 22, wherein said
control step controls white balance of the image picked
5 up in accordance with the second operation on the basis
of a white balance coefficient computed on the basis of
computed information about white balance and stored
information about white balance, when the object is
illuminated said illumination step in the first mode.

10

24. A medium according to claim 22, wherein said
control step controls white balance of the image picked
up in accordance with the second operation on the basis
of information about white balance acquired in the
15 second mode and stored information about white balance,
when the object is illuminated in said illumination
step in the second mode.

ABSTRACT OF THE DISCLOSURE

An image pickup method and apparatus which can realize accurate white balance reproduction and shorten the loop processing time for white balance processing are provided. A system controller selects at least one of the white balance coefficient calculated from image signal data before image pickup, the white balance coefficient calculated from image signal data after image pickup, and the result obtained by computing the two white balance coefficients, and displays at least one of processed data subjected to signal processing using the selected white balance coefficient on a display unit.

FIG. 1

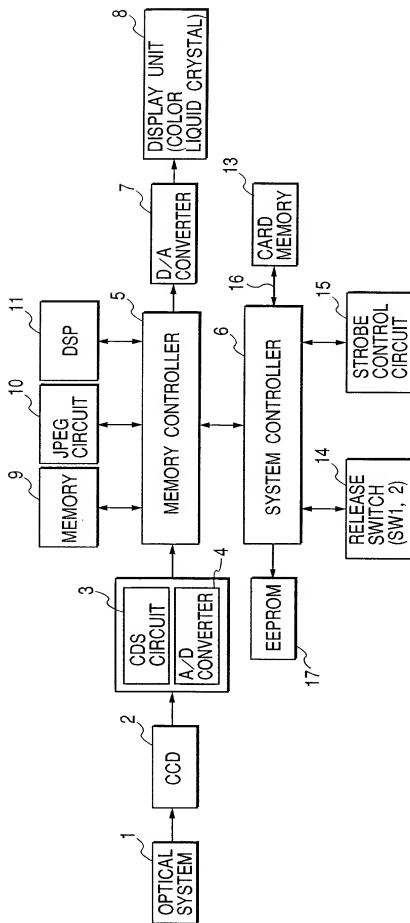


FIG. 2

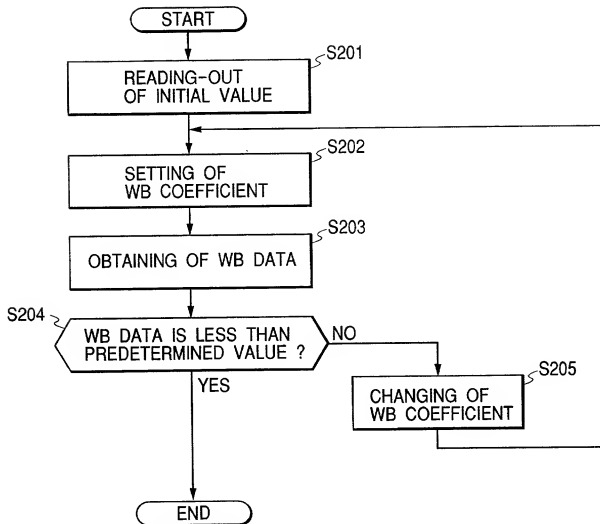


FIG. 3A




FIG. 3B




FIG. 3C

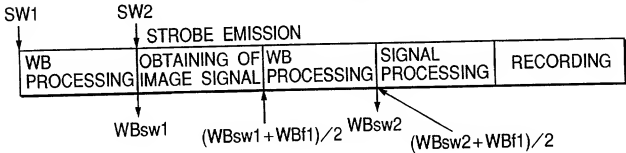


FIG. 3D

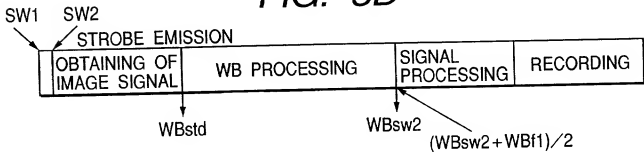


FIG. 4

	DISPLAY CIRCUIT ON	DISPLAY CIRCUIT OFF
NO STROBE	(1) INITIAL VALUE : WBstd COEFFICIENT : WBsw1	(2) INITIAL VALUE : WBstd COEFFICIENT : WBsw2
STROBE	(3) INITIAL VALUE : $(WBsw1 + WBf1)/2$ COEFFICIENT : $(WBsw2 + WBf1)/2$	(4) INITIAL VALUE : $(WBstd + WBf1)/2$ COEFFICIENT : $(WBsw2 + WBf1)/2$

FIG. 5A

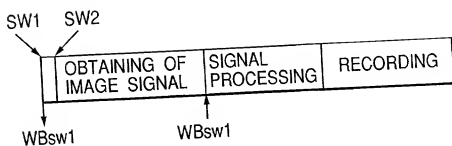


FIG. 5B

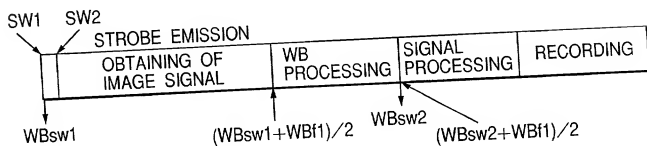


FIG. 6

